



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : H04N 7/24, 1/32, H03M 7/40		A1	(11) International Publication Number: <b>WO 00/42770</b>
			(43) International Publication Date: 20 July 2000 (20.07.00)
(21) International Application Number: PCT/EP00/00217		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 10 January 2000 (10.01.00)			
(30) Priority Data: 99100580.2 13 January 1999 (13.01.99) EP			
(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): KAMPERMAN, Franciscus, L., A., J. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). BRUEKERS, Alphons, A., M., L. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). VAN DER VLEUTEN, Renatus, J. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).			
(74) Agent: SCHMALZ, Günther; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).			

## Published


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

## (54) Title: EMBEDDING SUPPLEMENTAL DATA IN AN ENCODED SIGNAL

## (57) Abstract

There are two different methods of embedding supplemental data, e.g. for watermarking into an encoded signal. I) For an encoder, requiring auxiliary information for encoding (=probability information here), the auxiliary information to encode the supplemental data is derived from other data used in the encoding process. Thus the derived auxiliary data needs not be stored, which makes embedding economical in terms of bit amount. II) In the encoding process used for super Audio CD, a set of parameters (e.g. filter coefficients) is used by the encoder, whereby these parameters have to be stored, as they are needed for decoding. To embed supplemental data, at least one of the chosen parameters (e.g. the LSB of the first coefficient) is set to a dedicated value in response to the value of the supplemental data to be embedded. Thus the bit rate will not be affected at all.

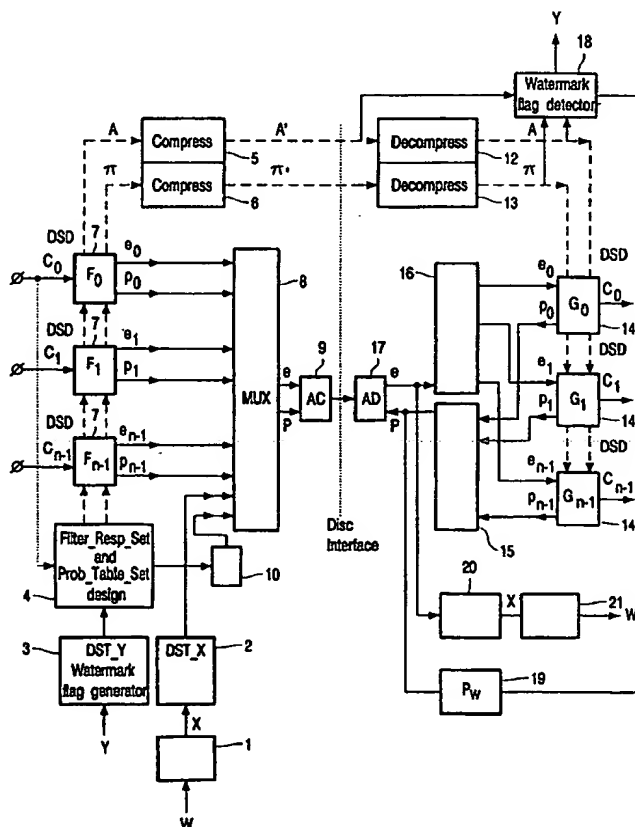

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Embedding supplemental data in an encoded signal.

The invention relates to an arrangement for and a method of embedding supplemental data in an encoded signal.

There is a growing need to accommodate supplemental data in encoded data, such as encoded audio and video signals, preferably without increasing the data rate.

5 Especially if the supplemental data is used as watermarks, it should be added in a perceptually invisible manner. Watermarks may comprise information, for example, about the source or copyright status of documents and audio-visual programs. They can be used to provide legal proof of the copyright owner, and allow tracing of piracy and support the protection of intellectual property.

10 The Super Audio Compact Disc (SACD) format, for example, specifies lossless coding (LLC) to allow about twice as many data effectively on the disc. The lossless coder is required to allow a playing time of up to 74 minutes of multi-channel audio in SACD quality. As the words "lossless coding" point out, the required storage capacity of any data is reduced in such a way that, after decoding, the original signal is reproduced bit-identically.

15 Such an encoder / decoder is described, for instance, in Improved Lossless Coding of 1-Bit Audio Signals, by Fons Bruekers, Werner Oomen, René van der Vleuten, Leon van de Kerkhof, Audio Engineering Society, 103<sup>rd</sup> Convention 1997, September 26-29, New York, 4563 (I-6). Encoding is performed by partitioning an input data stream into frames and determining a set of optimized parameters for each frame. Part of these parameters issued for

20 prediction to remove redundancies. The difference between the original signal and the prediction signal, which is referred to as residual signal, comprises much less relevant information, if good prediction parameters can be found. As lossless coding is envisaged, the residual signal cannot be omitted, but if it comprises less relevant information, it can be entropy-encoded very efficiently, using some other part of the optimized parameters. As the

25 redundant information is held in the parameter set, the parameter set as well as the entropy-encoded residual signal are stored and needed for lossless decoding.

If supplemental information is needed, for instance for purposes of watermarking, it may be added – as is fairly widely known – by adding it to the original signal in such a way that the signal amendment will not be noticed by a listener. A signal

altered like this can no longer be considered as a (bit true) original signal. Additionally, this kind of watermarking suffers from the fact that it is not possible to detect watermarks present in the encoded signal without lossless decoding. For reasons of simplicity of the watermark decoder, it is desirable to have the option to detect watermarks prior to lossless decoding

5

It is an object of the invention to provide an arrangement for and a method of embedding supplemental data in an encoded data signal, which allows the embedded supplemental data to be read without decoding the whole signal and does not influence music quality.

10

To this end, a method according to the invention is characterized in that, for embedding supplemental data, the supplemental information is inserted into the data, and the auxiliary information needed to encode the supplemental data is derived from other data available in the encoding process.

15

The advantage of the invention is that, by inserting the data into the data to be encoded, the supplemental information cannot be removed without disturbing the content of the encoded signal. As the auxiliary information needed to encode the supplemental information is derived from other data available in the encoding process, the auxiliary information to encode the supplemental data does not need to be recorded or stored for a later decoding process. Thus, this method is very economical with respect to the bit rate.

20

It is another object of the invention to provide an alternative to the first solution.

To this end, a further method according to the invention is characterized in that, for embedding supplemental data into the encoded signal, the parameter set is affected by the supplemental data. Thus, not all of the complete data has to be decoded to read a watermark, but only the part of the data where the parameters used for encoding/ decoding are contained. As the supplemental information is embedded in the parameter set, no additional bit has to be spent for this information.

25

The supplemental information may be embedded by choosing an even or odd number of parameters or by changing the least significant bit of e.g. the first parameter. As an example, an even number of parameters represents the value '1' of a watermark bit; an odd number of parameters represents the value '0' of a watermark bit.

30

The invention benefits from the fact that, for practical reasons (computation power, costs, ...), not the best set of parameters but a reasonably good set of parameters is

determined for encoding. Therefore, these algorithms have been designed to work with a sub-optimal set of parameters as a rule. Small changes in the parameter set, like changing the least significant bit of a parameter, adding a dummy parameter in order to achieve an odd or even number of parameters, whatever is needed to embed a watermark bit or even omit a parameter in order to achieve the odd or even number of parameters, will thus normally have no huge impact on the encoding efficiency. Sometimes, such a small variation of the parameter set may even marginally improve the encoding process.

An advantage of the invention is that, if the data should be kept in lossless coded form, the watermarks cannot be removed without decoding the signal and repeated lossless encoding of the data with an altered set of parameters. As the lossless decoder requires all coefficients, a missing or incorrect coefficient, which has been removed or changed to delete the watermark, will result in a signal loss for the duration of a frame for all channels.

Fig. 1 shows an arrangement for embedding two independent supplemental data  $x$ ,  $y$  into a lossless coded signal. First data  $x$  are used to embed watermark information  $w$ . As the length of the watermark  $w$  is longer than the information that could be stored by the supplemental data, the watermark  $w$  is packaged by a package generator 1 to a transport packet, which allows embedding of the bits of the data package like a serial signal. By means of a synchronization pattern included in the header of the transport packet, the beginning of the transport packet can be retrieved easily. The bits  $x$  of the transport packet are embedded bit by bit to the lossless coded signal as so-called DST\_X\_Bits.

Second data  $y$  is embedded by so-called DST\_Y\_Bits. An embedded DST\_Y\_Bit is set to the value '1' to indicate that the lossless coded signal applies to the up-to-date format. If there is any future need to have a flag, the DST\_Y\_Bit may be used. It should be obvious to those skilled in the art that the DST\_Y\_Bit in other recording systems may also be used in the form of a structured data stream to embed information which is longer than a single bit.

In order to encode  $n$  parallel data streams, which are referred to as data channels  $C_0 \dots C_{n-1}$ , the stereo or multi-channel DSD recordings are partitioned into frames. In the embodiment of the invention, seventy-five frames per second are used for each channel  $C_i$ . Although the data rate of the watermark signal  $w$  depends on the frame rate, the invention is not limited to a special frame rate.

For each frame, a control arrangement, which is not shown as it is not part of the invention, discriminates which mode is used for coding: LLC Plain mode or LLC Coded mode. The LLC Plain mode is used in exceptional cases if the compression ratio of a frame is insufficient, and actually contains plain DSD.

5           The chosen LLC algorithm is based on a prediction filter and a probability table. To optimize the compression ratio of the LLC Coded mode, a parameter control unit 4 analyzes each channel separately every frame again. The parameter control unit 4 calculates, for each channel  $C_i$ , a set of prediction filter coefficients  $A_i = a_i(1) \dots a_i(k_i)$  for each prediction filter and a set of probability table coefficients  $\Pi_i = \pi_i(1) \dots \pi_i(m_i)$  for each probability table.

10       In the embodiment of the invention, the length of a prediction filter coefficient  $a_i$  is nine bits, whereas the number  $k_i$  of prediction filter coefficients is variable, but is limited to a maximum value of 128. Each probability table coefficient  $\pi_i$  has a length of seven bits. The number  $m_i$  of the probability table coefficients  $\pi_i$  is also variable, but is limited by a maximum value of sixty-four. Typically, it is between thirty-two and sixty-four. These  
15       numbers are given as examples and represent the numbers which have been found to give the best results for audio signals, but should not be interpreted as limiting the invention to these numbers. The numbers of course depend on the frame rate, the prediction filter algorithm and the content of the source signal. However, other numbers allowing a better compression ratio might be found.

20           Determining optimal coefficients  $a$ ,  $\pi$  is difficult and requires considerable computing power. Therefore, a compromise is made to select just a reasonably good set of coefficients. As a separate coefficient set  $A_i$ ,  $\Pi_i$  is calculated for each channel  $C_i$ , the coefficient sets used for each channel will differ from each other, but do not need to differ in every case.

25           To insert a DST\_Y\_Bit into a frame, a flag generator 3 alters the least significant bit LSB of the first filter coefficient  $a_0(1)$ . As already mentioned before, no substantial decrease in encoding performance should be realized by slightly altering the filter coefficients.

30           All coefficients of the sets  $A$  and  $\Pi$ , including the modified coefficient  $a_0(1)$ , are substantial for the encoded signal and must thus be recorded for a later reading or decoding process. As all coefficient sets  $A$  as well as  $\Pi$  still have some redundancy, a first and a second compressor 5, 6 are used to generate compressed data words  $A'$ ,  $\Pi'$ . Preferably, a compression algorithm is used, which will allow the corresponding

decompression of  $A'$  and  $\Pi'$  in a most easy way, so that reading the embedded DST\_Y\_Bit could be done without great effort.

It is important that the coefficients, the values of which have been modified, are also used for the lossless encoding instead of the original evaluated coefficients.

5 Otherwise, the decoding process will fail. In this embodiment of the invention, the function of the lossless encoder is split up into an encoding prediction unit 7 for each channel  $C_i$  and an arithmetic encoder 9 which is common to all encoding prediction units 7. The structure of an encoding prediction unit 7 is shown in Figure 2.

An encoding prediction unit 7 comprises a prediction filter 71 which is  
10 initialized with the corresponding filter parameter set  $A_i$ . By means of a level converter 72, a binary '0' of the input signal  $x_i$  is converted into the numerical value '-1' and a binary value '1' is converted into the numerical value '+1' prior to inputting the input signal to the prediction filter 71. The output signal of the prediction filter 71 is quantized by a first and a second quantizer 73, 74. The output signal of the first quantizer 73 is ex-ored with the input  
15 signal  $x_i$  by means of an EXOR gate 75 and forms the residual signal  $e_i$ , which is the first of two output signals of the encoding prediction unit 7. The output signal of the second quantizer 74 serves as an index  $\alpha_i$  for a probability table stored in an array 76. The probability table consists of the probability parameter set  $\Pi_i$ . The output signal of the array 76 forms the second output signal of the encoding prediction unit 7, the probability signal  $p_i$ .  
20 The usage of the probability table is described in greater detail in the paper cited in the opening paragraph.

A multiplexer 8 merges the residual signals  $e_0 \dots e_{n-1}$  into  $e$  and the probability signals  $p_0 \dots p_{n-1}$  into  $p$ . The output of the watermark generator 2 is also fed to one input of the multiplexer 8. To embed the DST\_X\_Bits of the watermark information, the multiplexer  
25 8 inserts the DST\_X\_Bit in front of  $e$ . Due to the design of the arithmetic coder 9, a probability coefficient to code the DST\_X\_Bit, hereinafter referred to as the watermark probability coefficient  $p_w$ , is indispensable. To save storage space in the embodiment of the invention, the watermark probability coefficient  $p_w$  is derived from the first prediction filter coefficient  $a_0(1)$ . To this end, the first prediction filter coefficient  $a_0(1)$  of the first channel is  
30 fed to a watermark probability module 10. By means of this module, the first seven bits of the coefficient  $a_0(1)$  are interpreted in reverse order as an unsigned integral number  $D$  to which the value 1 is added. By using a derived value for the watermark probability coefficient, a recording of the watermark probability coefficient is not necessary and requires no

supplemental bit in the encoded data block. In this way, embedding the DST\_X\_Bit will lengthen the coded LLC block only marginally.

The arithmetic coder 9 generates the Coded DSD signal from the signal  $e$  and the probability signal  $p$ .

5 As the DST\_X\_Bit is inserted as the first bit of each block to be coded by the arithmetic coder 9, the DST\_X\_Bit may not be located as a single bit in the Coded DSD signal. Therefore, it cannot be removed without decoding the Coded DSD signal. Deleting or changing one or some bits will inevitably cause a loss of data of the whole frame. On the other hand, a rudimentary arithmetic decoder is sufficient for reading a watermark. Hence it  
10 meets the ideal of a watermark in a perfect manner: difficult to remove but easy to read. However, it is not mandatory to insert the DST\_X\_Bit in front of the signal  $e$ , but it will slightly simplify the decoding process of the watermark, as only the beginning of the Coded DSD signal has to be evaluated.

The following table shows the rough syntax of a frame coded in the LLC  
15 Coded Mode:

LLC bit	CNTRL	A'	$\Pi'$	CODED DSD
---------	-------	----	--------	-----------

In this case, the bit LLC has the value '1' to indicate an LLC Coded mode data block. The bits of the CNTRL sub-block contain some control information such as, for example, the  
20 number  $k_i$  of prediction filter coefficients and the number  $m_i$  of probability coefficients of a given channel  $Ch_i$ . The next two sub blocks A' and  $\Pi'$  contain the sets of the prediction filter coefficients A and the probability coefficients  $\Pi$  in compressed form. The last block CODED DSD finally contains the coded DSD signal. As explained hereinbefore, the length of the data blocks A, P and CODED DSD varies from frame to frame.

25 The LLC Coded data blocks are written onto a data carrier such as, for example, a SACD or a DVD. As the process of writing onto the data carrier and the process of reading from the data carrier are not part of the invention, but a lot of appropriate means are known to those skilled in the art, this is not described herein but symbolized by the dashed line 11 and referred to as disk interface.

30 In the reading device, here in the embodiment of the invention, for example, a SACD or a DVD disc player, a data block is detected as being an LLC Coded block if the first bit, the LLC-Bit, has the value '1'. In this case, the data block is divided into its sub-blocks A',  $\Pi'$  and CODED DSD by means of the data contained in the control data block



CNTRL. The sub blocks  $A'$  and  $\Pi'$  are decompressed by a first and a second decompressor 12, 13 to regain the coefficient sets  $A_i$ ,  $\Pi_i$ . For each channel a separate decoding prediction unit 14 is provided, each decoding prediction unit 14 comprising a prediction filter and a probability table. At the beginning of decoding an LLC encoded block, the coefficient sets  $A_i$ ,  $\Pi_i$  are loaded to the appropriate prediction filters and probability tables of the decoding prediction units 14.

The decoding prediction units 14 also reconstruct the probability signals  $p_0 \dots p_{n-1}$ , which are combined to the signal  $p$  by a multiplexer 15 of the reading device. The signal  $p$  is fed to an arithmetic decoder 16 which, by means of the probability signal  $p$ , decompresses the data contained in the sub-block CODED DSD to a data stream  $e$ . By means of a demultiplexer 17, the data stream  $e$  is split into the different residual signals  $e_0 \dots e_{n-1}$  of the individual channels and fed to the decoding prediction units 14.

The structure of a decoding prediction unit 14 is shown in Figure 3. The residual signal  $e_i$  of each channel is fed to a first input of an EXOR gate of the decoding sub-unit. The output of the EXOR gate forms the output signal of each channel  $Ch_i$ . The output signal is also fed to a level converter, which performs the same operation as the level converter in the recording device described hereinbefore. The output of the level converter is fed to the prediction filter. The output of the filter is fed to two quantizers. The output of the first quantizer is connected with the second input of the EXOR gate, the other output of the quantizer is used as an index  $\alpha_i$  for the probability table stored in an array. The values  $p_i$  of all that is selected by the index  $\alpha_i$  are fed via the multiplexer to the arithmetic decoder.

A flag detector 18 is used to reconstruct the embedded DST\_Y\_Bits. As the DST\_Y\_Bit is stored in the first coefficient, only the beginning of the compressed  $A'$  block has to be examined by the flag detector 18. The flag detector 18 decompresses only the beginning of the  $A'$  block and picks out the first filter coefficients  $a_0(1)$  of the first channel and analyzes its least significant bits to decide the value of the DST\_Y\_Bit. As the compressing algorithm for the  $A$  and  $\Pi$  blocks was chosen to allow easy decompression, the watermark detector may be designed very primitively as compared to the total decoder.

To extract the watermark  $w$ , the coefficient  $a_0(1)$  determined by the watermark flag detector 18 is fed to a watermark probability module 19 of the reading device. The watermark probability module calculates, as described for the recording device, the watermark probability coefficient  $p_w$ . The watermark probability coefficient  $p_w$  is fed to the arithmetic decoder to decode the DST\_X\_Bit. As the DST\_X\_Bit is the first bit outputted by the arithmetic decoder, it can easily be extracted by a watermark detector 20. However, with

a more sophisticated detector, it may be extracted anywhere from the signal, wherever it has been decided to insert it. A formatter 21 extracts the watermark information  $w$  from the DST\_X\_Bits, which are reconverted from a serial bit stream to a data block with the help of the synchronization pattern.

Although the watermark detection function may be integrated in the other decoding means of the reading device, this structure shows that a watermark detection may be done in a stand-alone situation. There is no need to decode the whole coded DSD signal. Therefore, the watermark flag detector 18, the watermark probability module 19, the watermark detector 20 and the formatter 21 may also be integrated in a device of its own and run without the more complicated functions incorporated in the decoding prediction units 14.

The LLC Coded mode has hitherto been described. As described above, if sometimes encoding fails to reduce the bit rate, the signal can just be stored as plain DSD. This data mode is referred to as LLC Plain mode and shown below:

LLC Bit	DTS_X_Bit	Plain DSD
---------	-----------	-----------

The LLC bit is set to the value of '0' to indicate that the frame contains Plain DSD. The bit following the LLC Bit is used to store the DTS\_X\_Bit of the watermark in plain format. The DTS\_X\_Bit is followed by the Plain DSD data. This ensures that every coded block contains a DTS\_X\_Bit, regardless of whether it is a Coded DSD or a Plain DSD block. This has the advantage that the serial data stream of the DST\_X\_Bits does not depend on the format that is used. On the other hand, it is true that the plain DTS\_X\_bit of a Plain DSD may be changed without doing any harm to the signal content of a block in Plain DSD. However, as a Plain DSD block is the exception in the great majority, there will be more than enough uninterrupted Coded DSD blocks to carry the watermark in full length.

In a further embodiment of the invention, more than one supplemental bit is embedded into the lossless coded signal by changing more than one LSB of the parameters. To embed two bits per frame, for instance, the first and the second prediction filter coefficient  $a_1(0)$ ,  $a_2(0)$  of the first audio channel are unused. These two bits may be used to represent the following information:

LSB $a_0(1)$	LSB $a_0(2)$	Meaning
0	0	Watermark bit '0'
0	1	Watermark bit '1'
1	0	Synchronization symbol
1	1	Reserved for future use

As only one watermark bit is provided for use in each frame, the watermark information has to be written in a serial data format. Therefore, the synchronization symbol '10' serves to detect the beginning of the watermark information.

## CLAIMS:

1. A method of encoding data (e) by means of auxiliary information (p), characterized in that,  
for embedding supplemental data (x), the supplemental information (x) is inserted into the data (e), and the auxiliary information (p<sub>w</sub>) needed to encode the supplemental data is derived  
5 from other data (a<sub>0</sub>(1)).
2. A method of extracting supplemental data of encoded data as defined in claim 1.
- 10 3. A method of encoding input data by partitioning the data into frames, determining a set of parameters for each frame, reducing the data rate of the input signal by applying an algorithm which is controlled by the parameter set whereby the encoded data comprises the set of parameters or at least data which can be used to derive the parameter set and the data rate-reduced signal,  
15 characterized in that,  
for embedding supplemental data (y) into the encoded signal, the parameter set is affected by the supplemental data (y).
4. A method of extracting information which is embedded in the parameter set of  
20 an encoded signal as defined in claim 3.
5. A signal comprising encoded data as claimed in claim 1 or 3.
6. A data carrier with a recorded signal as claimed in claim 5.
- 25 7. An arrangement for performing a method as claimed in claim 1, 2, 3 or 4.
8. A playback device with an arrangement as defined in claim 2 and/or 4.

9. A playback device as claimed in claim 7, characterized that it is a Disc player for audio and audio-visual media, respectively.

1/2

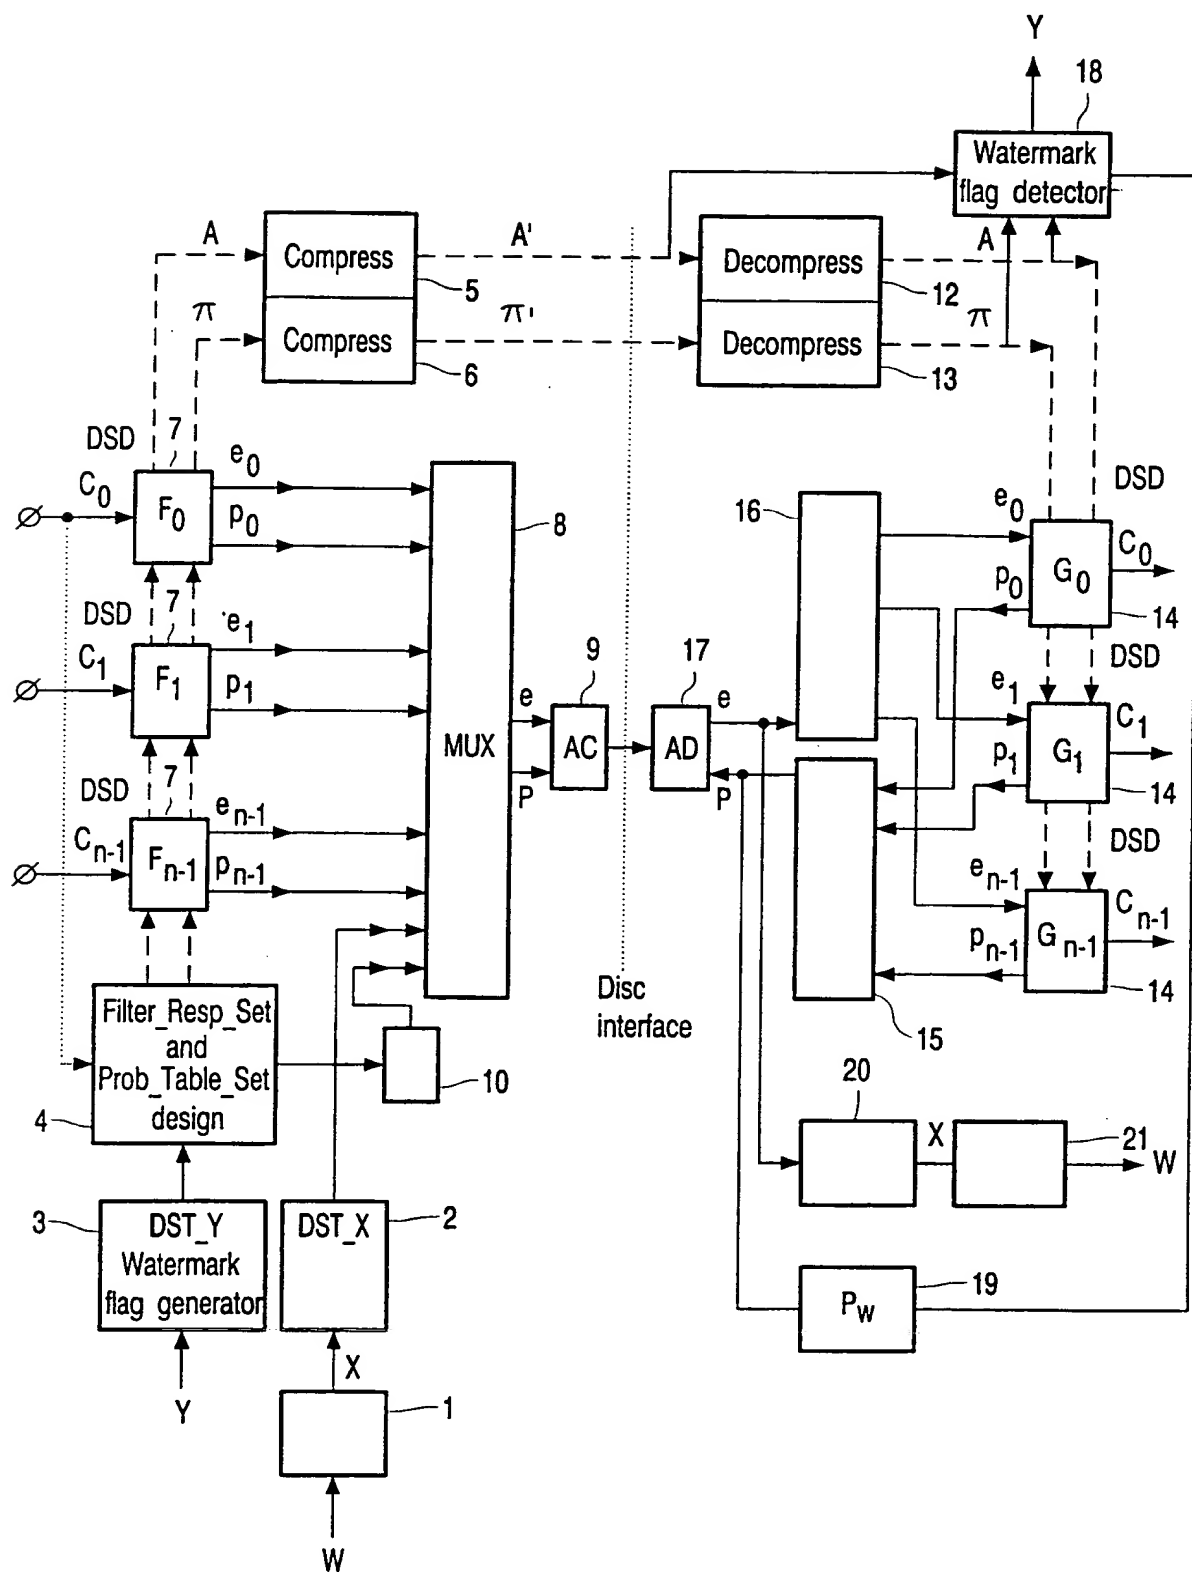


FIG. 1

2/2

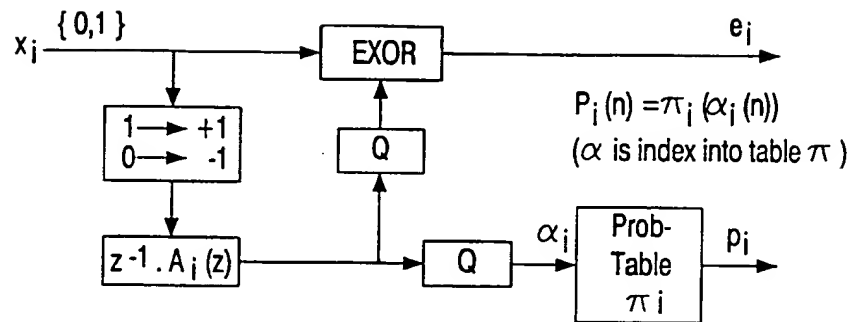


FIG. 2

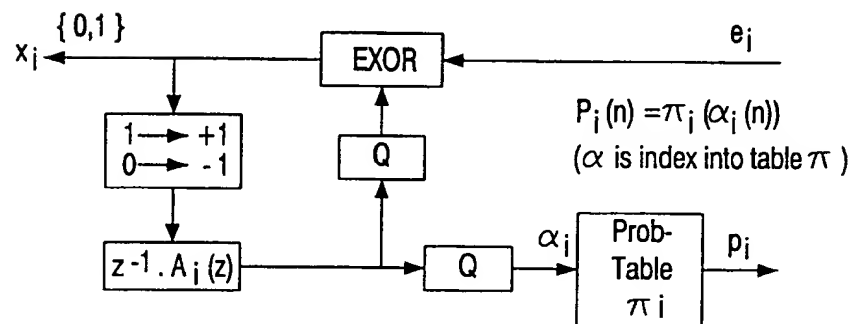


FIG. 3

# INTERNATIONAL SEARCH REPORT

Inter. Appl. No.

PCT/EP 00/00217

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N7/24 H04N1/32 H03M7/40

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N H03M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 13248 A (PHILIPS ELECTRONICS NV ;PHILIPS NORDEN AB (SE)) 10 April 1997 (1997-04-10) page 1, line 1 -page 2, line 23	3-9
A	abstract	1,2
X	WO 98 33176 A (KONINKL PHILIPS ELECTRONICS NV ;PHILIPS NORDEN AB (SE)) 30 July 1998 (1998-07-30)	3-9
A	page 11, line 28 -page 12, line 17	1,2
X	WO 98 31152 A (FRIMOUT EMMANUEL DAVID LUCAS M ;KONINKL PHILIPS ELECTRONICS NV (NL) 16 July 1998 (1998-07-16)	3-9
A	page 1, line 19 -page 2, line 23 abstract	1,2
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 April 2000

Date of mailing of the international search report

09/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

La, V



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/00217

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 16014 A (PHILIPS ELECTRONICS NV ;PHILIPS NORDEN AB (SE)) 16 April 1998 (1998-04-16) page 7, line 6 -page 8, line 32 abstract; figures 10,11 ----	1-9
A	HARTUNG F ET AL: "Copyright protection in video delivery networks by watermarking of pre-compressed video" MULTIMEDIA APPLICATIONS, SERVICES AND TECHNIQUES - ECMAS'T '97. SECOND EUROPEAN CONFERENCE. PROCEEDINGS, MULTIMEDIA APPLICATIONS, SERVICES AND TECHNIQUES - ECMAS'T '97. SECOND EUROPEAN CONFERENCE. PROCEEDINGS, MILAN, ITALY, 21-23 MAY 1997, pages 423-436, XP002135750 1997, Berlin, Germany, Springer-Verlag, Germany ISBN: 3-540-63078-3 section 4 "Digital watermarking of uncoded video in the pixel domain" section 5 "Digital watermarking of coded video in the MPEG-2 bitstream domain" ----	1-9
A	COX I J ET AL: "A REVIEW OF WATERMARKING AND THE IMPORTANCE OF PERCEPTUAL MODELING" PROCEEDINGS OF THE SPIE, February 1997 (1997-02), XP000669449 section 4 "Proposed methods" -----	1-9

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/00217

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9713248 A	10-04-1997	CN 1166224 A EP 0795174 A JP 10510660 T	26-11-1997 17-09-1997 13-10-1998
WO 9833176 A	30-07-1998	AU 5337598 A AU 5493398 A CN 1220756 T CN 1220805 T EP 0902946 A EP 0906700 A WO 9833325 A	18-08-1998 18-08-1998 23-06-1999 23-06-1999 24-03-1999 07-04-1999 30-07-1998
WO 9831152 A	16-07-1998	AU 7995598 A EP 0891674 A EP 0934656 A WO 9911064 A	03-08-1998 20-01-1999 11-08-1999 04-03-1999
WO 9816014 A	16-04-1998	AU 4217397 A BR 9706828 A CN 1209917 A EP 0865685 A HU 9902037 A PL 327230 A EP 0922334 A WO 9856116 A	05-05-1998 23-03-1999 03-03-1999 23-09-1998 29-11-1999 07-12-1998 16-06-1999 10-12-1998

## PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>PHN 17.285W0</b>	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. <b>PCT/EP 00/ 00217</b>	International filing date (day/month/year) <b>10/01/2000</b>	(Earliest) Priority Date (day/month/year) <b>13/01/1999</b>
Applicant <b>KONINKLIJKE PHILIPS ELECTRONICS N.V. et al</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 4 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

**1. Basis of the report**

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

☐ the text is approved as submitted by the applicant.

☒ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☐ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☒ because this figure better characterizes the invention.

1

☐ None of the figures.

## Box III TEXT OF THE ABSTRACT (Continuation of item 5 of the first sheet)

The abstract is modified as follows:

line 3: after "encodere" delete "(which needs)" and replace by 'requiring';  
line 4: after "information" delete "in this special case and replace by 'here';  
line 5: after "from" delete "data..-otherwise and replace by 'other data used';  
line 5: delete the last word ,  
line 6: delete "advantage...that and insert "Thus and delete "does.. have and ;  
by "needs not", delete "so that" and replace by "which makes", delete "the"  
line 7: delete "supplemental... is" and with....used. and replace by "in terms  
of bit amount".  
Last line: delete "The...that and replace by "Thus"

## INTERNATIONAL SEARCH REPORT

National Application No.

PCT/EP 00/00217

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N7/24 H04N1/32 H03M7/40

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N H03M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 13248 A (PHILIPS ELECTRONICS NV ;PHILIPS NORDEN AB (SE)) 10 April 1997 (1997-04-10) page 1, line 1 -page 2, line 23	3-9
A	abstract	1,2
X	WO 98 33176 A (KONINKL PHILIPS ELECTRONICS NV ;PHILIPS NORDEN AB (SE)) 30 July 1998 (1998-07-30)	3-9
A	page 11, line 28 -page 12, line 17	1,2
X	WO 98 31152 A (FRIMOUT EMMANUEL DAVID LUCAS M ;KONINKL PHILIPS ELECTRONICS NV (NL) 16 July 1998 (1998-07-16)	3-9
A	page 1, line 19 -page 2, line 23 abstract	1,2
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 April 2000

Date of mailing of the international search report

09/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

La, V

## INTERNATIONAL SEARCH REPORT

International Application No

/EP 00/00217

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 16014 A (PHILIPS ELECTRONICS NV ;PHILIPS NORDEN AB (SE)) 16 April 1998 (1998-04-16) page 7, line 6 -page 8, line 32 abstract; figures 10,11 ---	1-9
A	HARTUNG F ET AL: "Copyright protection in video delivery networks by watermarking of pre-compressed video" MULTIMEDIA APPLICATIONS, SERVICES AND TECHNIQUES - ECMAS'T '97. SECOND EUROPEAN CONFERENCE. PROCEEDINGS, MULTIMEDIA APPLICATIONS, SERVICES AND TECHNIQUES - ECMAS'T'97. SECOND EUROPEAN CONFERENCE. PROCEEDINGS, MILAN, ITALY, 21-23 MAY 1997, pages 423-436, XP002135750 1997, Berlin, Germany, Springer-Verlag, Germany ISBN: 3-540-63078-3 section 4 "Digital watermarking of uncoded video in the pixel domain" section 5 "Digital watermarking of coded video in the MPEG-2 bitstream domain" ---	1-9
A	COX I J ET AL: "A REVIEW OF WATERMARKING AND THE IMPORTANCE OF PERCEPTUAL MODELING" PROCEEDINGS OF THE SPIE, February 1997 (1997-02), XP000669449 section 4 "Proposed methods" -----	1-9

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

/EP 00/00217

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9713248 A	10-04-1997	CN 1166224 A EP 0795174 A JP 10510660 T	26-11-1997 17-09-1997 13-10-1998
WO 9833176 A	30-07-1998	AU 5337598 A AU 5493398 A CN 1220756 T CN 1220805 T EP 0902946 A EP 0906700 A WO 9833325 A	18-08-1998 18-08-1998 23-06-1999 23-06-1999 24-03-1999 07-04-1999 30-07-1998
WO 9831152 A	16-07-1998	AU 7995598 A EP 0891674 A EP 0934656 A WO 9911064 A	03-08-1998 20-01-1999 11-08-1999 04-03-1999
WO 9816014 A	16-04-1998	AU 4217397 A BR 9706828 A CN 1209917 A EP 0865685 A HU 9902037 A PL 327230 A EP 0922334 A WO 9856116 A	05-05-1998 23-03-1999 03-03-1999 23-09-1998 29-11-1999 07-12-1998 16-06-1999 10-12-1998